


STANDARD ACCESSORIES

ARCTIC-LOCK™ COUPLER

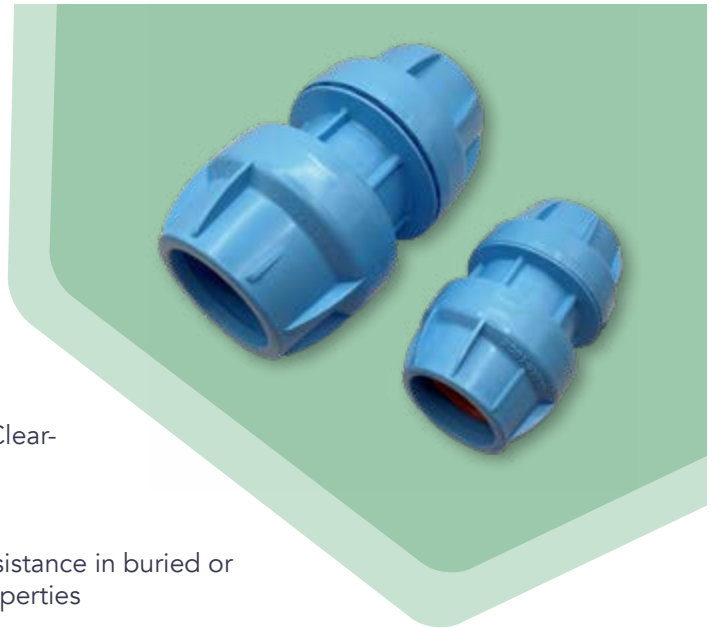

- ▶ Designed for cold temperatures
- ▶ Increased impact strength reduces the risk of cracking or shattering under installation force
- ▶ Can withstand at least 35% higher impact than standard Clear-Lock couplers, or 4.7 Jauls impact at -18C
- ▶ Ideal for pull boxes, vaults or other limited access areas
- ▶ Non-metallic construction provides excellent corrosion resistance in buried or encased applications and also has desirable dielectric properties
- ▶ Simple, one person 'push-on' assembly lowers installation costs
- ▶ Self-locking ring design assembles in seconds and is re-enterable
- ▶ High strength molded plastic body is ideal for buried duct applications
- ▶ Pre-lubricated O-ring is water-tight and air-tight
- ▶ Suitable for both cable pulling & jetting applications

ORDER REFERENCE

| DESCRIPTION | NOM OD | DUCT OD WORKING RANGE | LENGTH (IN) | PULL OUT STRENGTH (LBS) | MAX PRESSURE (PSI) | CARTON QTY | DURA-LINE PART # |
|----------------------------|--------|-----------------------|-------------|-------------------------|--------------------|------------|------------------|
| 3/4" Arctic-Lock Coupler | 1.050" | 1.040" - 1.060" | 3" | 500 | 250 | 144 | 20094317 |
| 1" Arctic-Lock Coupler | 1.315" | 1.305" - 1.325" | 2.6" | 600 | 250 | 50 | 20094318 |
| 1 1/4" Arctic-Lock Coupler | 1.660" | 1.650" - 1.670" | 5" | 700 | 250 | 50 | 20094319 |
| 1 1/2" Arctic-Lock Coupler | 1.900" | 1.890" - 1.910" | 5.5" | 800 | 250 | 25 | 20094320 |
| 2" Arctic-Lock Coupler | 2.375" | 2.365" - 2.385" | 7" | 2,000 | 250 | 15 | 20094321 |



An Orbia Connectivity Solutions business.

+1 800 847 7661
WWW.DURALINE.COM

