

## SPECIALTY

# UTILITY GRADE FLEX DUCT

- ▶ Utility grade PVC flexible duct
- ▶ Flexible PVC: eliminates the need for special preformed bends
- ▶ Manufactured to SCH 40 sizing specifications
- ▶ Glues to standard PVC fittings
- ▶ Temperature range: -10 F to 130 F
- ▶ Excellent cable protection from ground line to meter/service box


### INSTALLATION TYPES

Cable Protection  
Above and Below  
Ground

### SIZE RANGE

2 1/2"  
3"  
4"

### STANDARD COLORS

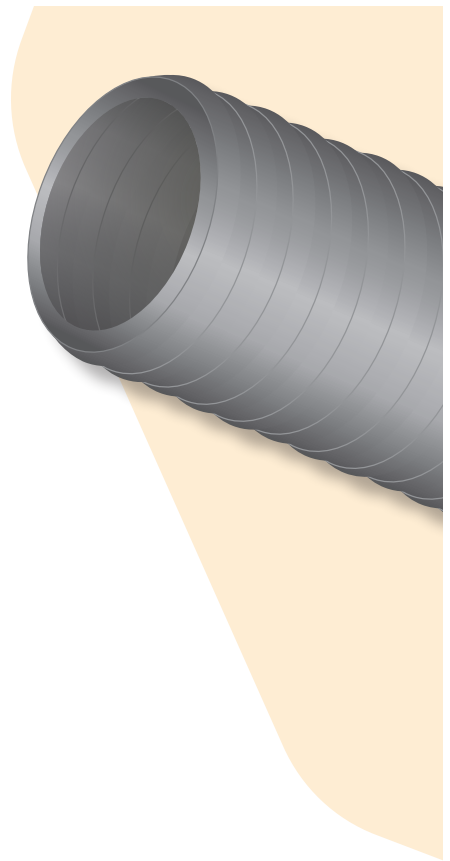

### ORDER REFERENCE

DESCRIPTION	NOM OD (IN)	MIN BEND RADIUS (IN)	COIL LENGTH (FT)	WEIGHT/COIL (LBS)	PART #
2 1/2" Utility Grade Flex Duct	2.890	7	50	48	20000414
3" Utility Grade Flex Duct	3.500	8	50	64	20000490
4" Utility Grade Flex Duct	4.500	11	50	97	20000491



An Orbia Connectivity Solutions business.

+1 800 847 7661  
WWW.DURALINE.COM

TL9000

